



CUBEX

For product specifications, materials and colours, please refer to the details inside

Cube X

Technical data

INSTALL

Road tunnels

ACCESSIBILITY



Openable


Openable fixture with basic tools
Replaceable internal components
using basic tools.

OPTICAL TECHNOLOGY



Glassed

Refracting optical system consist of
singlechip LED, PMMA lenses with
30 years of warranty against UV
and yellowing by aging, aluminium
reflector having a purity of 99,7% and
extra clear tempered glass.

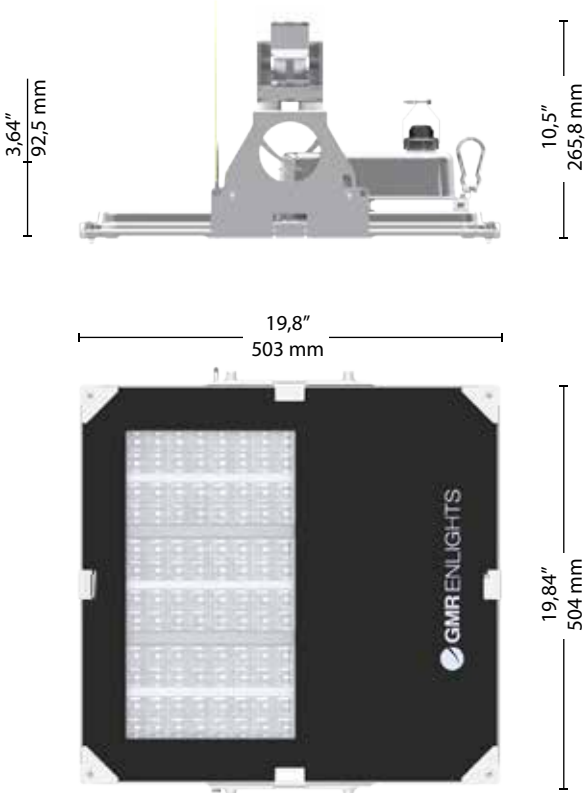

Max. weight

15,4 Kg

STANDARD

EN 60598-1, EN 60598-2-3, EN 62471, EN 55015, EN 61547, EN 61000-3-2,
EN 61000-3-3, UNI 11095

CONFORMITY | PROTECTION

Conformity



Insulation classes



Protection classes



Photobiological safety



Classe 0 Exempt
group IEC/TR62471

PLUS



CUT OFF



OPTICAL
FLEXIBILITY



LOW GLARE



COMPLIANT



IPEA MIN

LIGHTING FIXTURE FEATURES

General features

Power source:	220-240V 50/60Hz tolerance +/-10%
Current supply:	350 mA 525 mA 700 mA (P _{max} = 211W)
Power Factor THD:	≥0.95 65% ≤ THD ≤ 100%
Expected life (Ta=25°):	> 100.000 h L90B10 @ LED 700mA
Operational temperature (Ta):	T _{min} = -40°C T _{max} = +40°C 700 mA
Storage temperature:	-40°C/+80°C
Overcharge protection:	Main surge immunity up to 10kV

Operating ambient humidity: 0%÷80%

Standard equipment:	Power cable type FG70M106 / 1kV 2x1.5, plug type IEC309 2P + T 230V 16A- IP68
Duct-body insulation:	Constant 4kV 8kV impulse
Standard functions:	Current fixed CLO

Materials


Lighting fixture:	AISI 316 stainless steel to be molded without welding
Optical system:	Optics in PMMA Aluminium reflector, 99,7% oxidised and polished purity
Screen:	Screen-printed ultraclear tempered glass Th. 4mm
Gaskets:	Removable silicon
Cable gland:	AISI 304 stainless steel

Screws and bolts:	A4 stainless steel
Bracket:	AISI 316 stainless steel
Security cable:	Steel
Fixture color:	Steel
Silkscreen color:	RAL 9005

LED FEATURES

LED data 4.000 K - 700mA:	340 lm/LED 180 lm/W 25°C [Tj] ≤ 3 step MacAdam
Color temperature:	5.700 K 6.000 K CRI ≥ 70

TUNNEL BRACKETS

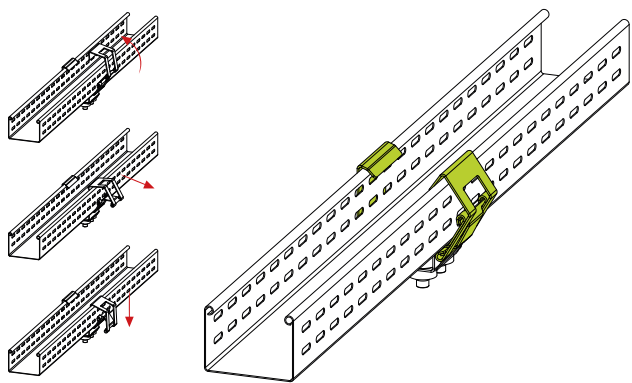

OPTIONAL

Additional surge protector SPD with warning LED CLASS 1 | CLASS 2 12kV/kA device:

Optional functions: DALI-DALI2 | DALI SENSOR

Connectors and sockets: NM (Nema Socket) | LM (Lumawise Zhaga Socket)
Zhaga STD remote control | Zhaga GPS remote control

Focus: FIXING TUNNEL (*)

Rotation axes for cable channel installation




The tunnel version was implemented to ensure safety and reliability in the permanent and reinforcement lighting of tunnels and galleries. The fastening systems developed provide for the possibility of adjusting the inclination of the body to compensate for any anomalies in the support.

Regulations(*)

X axis


Y axis

Z axis



Bracket for tunnel install


A = 75 / 100 mm
B = from 100 to 300 mm

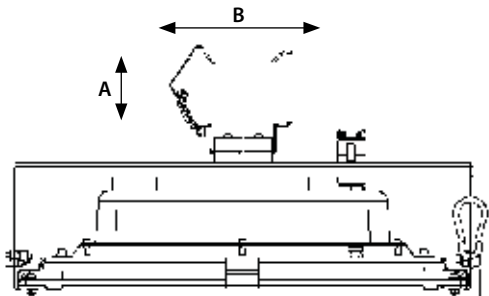


(*) The adjustments depend on the installation bracket, and therefore on the permanent lighting or reinforcement, defined in the design lighting project phase

FLOODLIGHTS DISTRIBUTION\\


11A

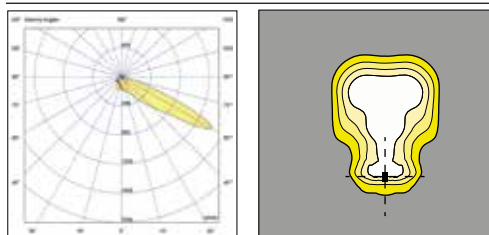


11B

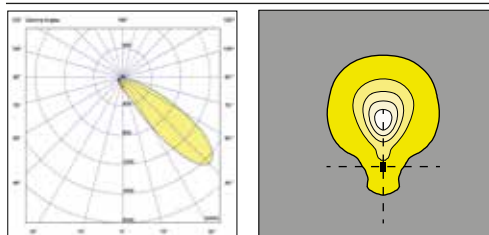

11E

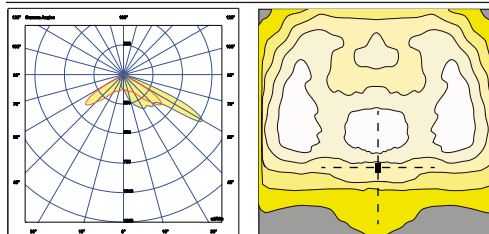

11F

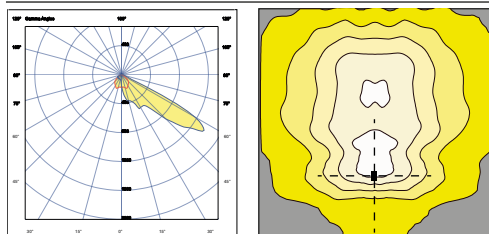

The LED modules nominal data refers only to the LED light sources in a standard version, with 4000 K color temperature, color rendering index CRI 70 min. and a junction temperature tj of 25°C. The LED nominal data are extrapolated from the manufacturer documentations.

LED code	(*) I [mA]	Luminous flux [lm]	Power [W]	Efficiency [lm/W]
GL08	350	6472	31,6	205
	525	9183	48,2	191
	700	11650	66,0	177
GL10	350	8090	41,0	198
	525	11479	61,0	188
	700	14421	81,4	177
GL12	350	9616	48,2	200
	525	13642	71,9	190
	700	16965	97,1	175
GL14	350	11326	58,2	194
	525	15916	84,6	188
	700	19792	114,1	173
GL16	350	12821	63,7	201
	525	18014	97,1	186
	700	22620	127,9	177
GL18	350	14286	71,4	200
	525	20067	107,2	187
	700	25192	143,5	176
GL20	350	15873	79,2	200
	525	22296	121,4	184
	700	27991	159,6	175
GL22	350	17122	87,9	195
	525	24041	129,3	186
	700	30167	174,8	173
GL24	350	18224	93,4	195
	525	25799	143,1	180
	700	34048	194,1	175

The lighting fixture measured data refers to GMR ENLIGHTS products in a standard version, with 4000 K color temperature, optica type 3B and an ambient temperature ta of 25 °C.

GMR ENLIGHTS offers the possibility of driving the device with custom currents (*).

Feature availability is subject to configurations. To obtain luminous fluxes and efficiencies of the lighting fixture in case of optic type and/or color temperature and/or color rendering index different from the standard use the conversion factors shown in the tables.

Order code: CUX_GLxx	(*) I [mA]	Flusso luminoso [lm]	Potenza [W]	Efficienza [lm/W]
GL08	350	5695	35,5	160
	525	8081	53,5	151
	700	10252	72,5	141
GL10	350	7119	45,5	156
	525	10102	67,0	151
	700	12690	89,5	142
GL12	350	8462	53,5	158
	525	12005	79,0	152
	700	14929	105,5	142
GL14	350	9967	64,0	156
	525	14006	92,0	152
	750	18089	131,0	140
GL16	350	11283	70,0	161
	525	15852	105,5	150
	700	19905	139,0	143
GL18	350	12571	78,5	160
	525	17659	116,5	152
	700	22169	156,0	142
GL20	350	13968	87,0	161
	525	19621	132,0	149
	700	24632	173,5	142
GL22	350	15068	95,5	158
	525	21156	140,5	151
	700	26547	190,0	140
GL24	350	16037	101,5	158
	525	22703	155,5	146
	700	29962	211,0	142

OPTIC CONVERSION FACTOR LUMINOUS FLUX		Tk CONVERSION FACTOR LUMINOUS FLUX		CRI CONVERSION FACTOR LUMINOUS FLUX	
Optic type	Flux multiplier	Tk [K]	Flux multiplier	CRI (color render index)	Flux multiplier
1A 11C	1	3.000	0,94	70	1,00
1B 1C 1D 2A 2B	0,99	5.700	1,01	80	0,93
3A 3C 3D 3E 3F 3G 3H	0,99				
4A 4B	0,98				
5A 11D	1,01				
11A 11B	1,00				

(*) See pag: Available optical system, to check the optic type availability.
(**) See pag: Technical data, to check the colour temperatureb availability.

Functions

Standard functionality

Fixed current

During production, the light fixture is pre-set with a fixed current amongst the standard settings that appear in the tables on page 3. Upon customer's request, it is also possible to set a specific current (custom setting).

Virtual Midnight | Automatic dimming

The driver is programmed to automatically dim the light output according to the time. As required by regulations, the maximum output is set during initial hours and towards the end of the light fixture's operating time interval. During these hours there is statistically more traffic. The light output is then dimmed during the central hours of the operating time interval. This management is achievable through a self-learning process of the device, that establishes the centre point of the time interval. This moment is called "virtual midnight" and it is the point that the dimming profile refers to in order to know when to reduce the light output. We can manage up to 8hrs of programming that evolve around the virtual midnight and up to 5 steps of dimming. This way the light output will adjust automatically, adapting throughout the year to the duration of the nighttime, by referring to the pre-set parameters based on the centre point of the operating time interval.

CLO Constant Lumen Output

LEDs over time are inevitably subject to performance depreciation. This light reduction may be compensated by gradually increasing the LED's current during its lifespan, this corresponds to a gradual increase of lumen output proportional to the amount that is naturally depreciated.

On request functionality

DALI2 Control and monitoring system

On request, the fixture can be fitted with a DALI2 communication interface. This protocol allows it to be monitored and controlled remotely through use of Dali control buses.

D4i

On request, the fixture can be equipped with a D4i certified power supply. This is the ideal solution for wireless sensors and/or controls. This system was developed to integrate various systems to address smart city requirements. Included is DALI2 protocol + auxiliary power (AUX) to supply power to devices and sensors. This system is usually required when using a Zhaga socket.

LINESWITCH

This functionality by using an extra wire within the streetlight's power line, allows to dimmer to a pre-set level. For example, a centralised timer can change this value from 100% to 50%, and vice versa.

AMPDIM

This feature allows dimming using the power line controlled by an upstream flow regulator. For this feature, the flow controller must use amplitude modulation (AM).

NEMA | Nema Socket (7 PIN)

The Nema Socket is a 7 PIN connector/socket with IP66 rating, that is fitted on the fixture to make it interfaceable with various ANSI C136 compliant devices and remote-control gear.

These devices can be installed during or after installation of the light fixtures. The NEMA socket can provide power interruption and is interfaceable with DALI buses and/or 1-10V dimming. It is compatible with point-to-point node connection, and twilight sensors ect.

ZHAGA Zhaga Socket (4 PIN)

The Zhaga socket is a small and compact 4 Pin connector/socket, that is fits ideally with the design of GMR ENLIGHTS fixtures. With ZHAGA sockets it is possible install the devices, sensors, ZHAGA remote controls during or after installation of the light fixtures. This socket is usually required in conjunction with the DALI Sensor feature, which involves a DALI2/D4i communication protocol in addition to 12/24V auxiliary port to supply power to the sensors. It is compatible with point-to-point wireless control solutions and SMART CITY applications to control and monitor the public lighting infrastructure.


PRESENCE SENSOR

The product can be equipped with a presence sensor type zhaga book 18 in the lower part of the luminaire. In this case the lighting body is provided with Zhaga socket and Driver D4i. It is very important to carefully evaluate the installation context (height and underlying area) according to the sensing diagram of the device.


Third-party remote control

GMR ENLIGHTS fixtures are compatible with most third-party remote controls, powerline communication systems, wired systems (buses) and wireless systems.


Example of 4-step adjustment with virtual midnight

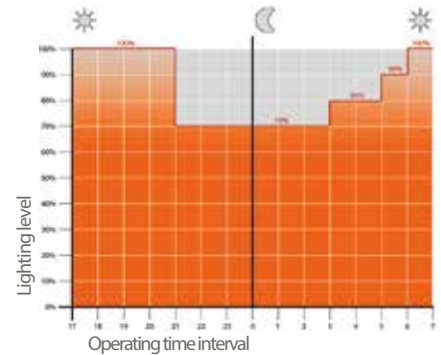


CLO Light Flow Compensation

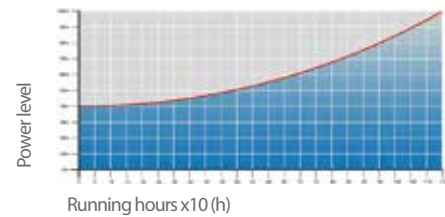

7 Pin Nema Socket 7 (A) and IP66 shorting cap (B)

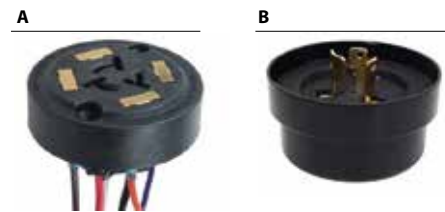

4 Pin Zhaga Socket (C) and IP66 cap (D)

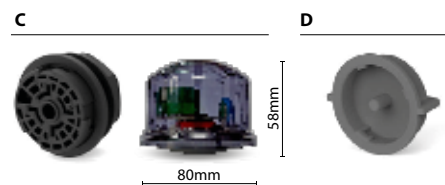

Installation example of Zhaga



Installation example of presence sensor

